

Wie Sie ein Pianobox USB Firmware Update machen:

- 1) Laden Sie das Zip File und entpacken es in einen neuen Ordner
- 2) Schliessen Sie die Pianobox USB an einen Windows PC an und schalten Sie an
- 3) Warten Sie bis eine etwaige Class compliant Installation abgelaufen ist und die Pianobox als USB Audio Device oder Pianobox erkannt wurde
- 4) Starten Sie das File "Update.exe" - Die DOS Box öffnet das Firmware File und erkennt die MIDI IN & OUT Ports der Pianobox USB

```
MIDITECH Update V0.1 -> PianoBox III System
OK: File 'PianoBox.kit' is open.
MIDI IN DEVICE: USB Device
MIDI OUT DEVICE: USB Device
MIDI OUT DEVICE: USB Device
Please wait the system reset and retry again!

Drücken Sie eine beliebige Taste . . .
```

- 5) Drücken Sie eine beliebige Taste auf der Computer Tastatur, das Update Programm wird beendet.
- 6) Schalten Sie die Pianobox USB aus und wieder an.
- 7) Starten Sie das Update Tool ein zweites Mal.

```
MIDITECH Update V0.1 -> PianoBox III System
OK: File 'PianoBox.kit' is open.
MIDI IN DEVICE: USB Device
MIDI OUT DEVICE: USB Device
MIDI OUT DEVICE: USB Device
Transferring.. 100% done.
Target update successfully!

The System is restart, please wait!


Drücken Sie eine beliebige Taste . . .
```

- 8) In der DOS Box sehen Sie nun das Update und den Fortschritt in %.

- 9) Danach bootet die Pianobox USB neu und die neue Firmware ist startbereit.
- 10) Drücken Sie eine beliebige Taste auf der Computer Tastatur, das Update Programm wird beendet.

How to do the Pianobox USB Firmware Update:

- 1) Download and unzip the Firmware zip file into a new folder
- 2) Connect the Pianobox USB with an USB cable to a Windows computer and switch the Pianobox USB on
- 3) Please wait some seconds, until the class compliant installation is done and finished. The Pianobox will be recognised as USB Audio Device or Pianobox
- 4) Start the file "Update.exe" - a DOS Box opens and shows the firmware file, it recognises the MIDI IN & OUT ports of the Pianobox USB

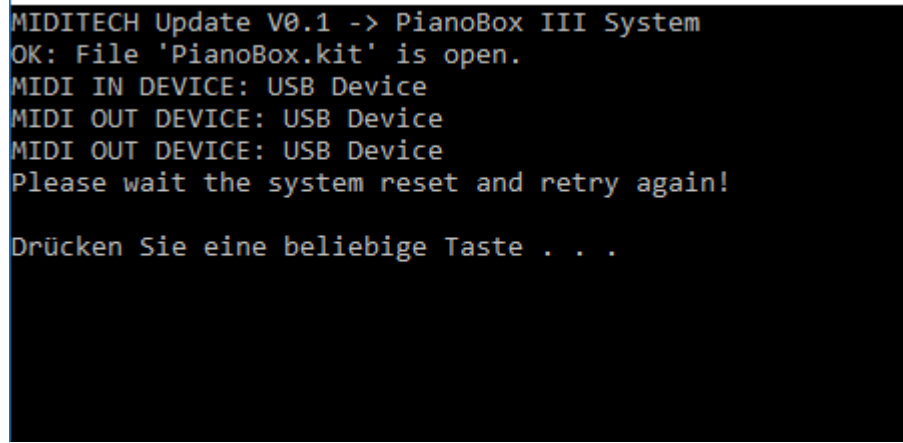

```
MIDITECH Update V0.1 -> PianoBox III System
OK: File 'PianoBox.kit' is open.
MIDI IN DEVICE: USB Device
MIDI OUT DEVICE: USB Device
MIDI OUT DEVICE: USB Device
Please wait the system reset and retry again!

Drücken Sie eine beliebige Taste . . .
```

- 5) Press a key on your computer keyboard to close the window and shut down the update program
- 6) Switch off the Pianobox USB and switch it on again a second time
- 7) Start the "Update.exe" a second time

```
MIDITECH Update V0.1 -> PianoBox III System
OK: File 'PianoBox.kit' is open.
MIDI IN DEVICE: USB Device
MIDI OUT DEVICE: USB Device
MIDI OUT DEVICE: USB Device
Transferring.. 100% done.
Target update successfully!

The System is restart, please wait!

Drücken Sie eine beliebige Taste . . . █
```

- 8) In the DOS window you now can see the update and it's progress in percent %
- 9) After this the Pianobox USB starts it's firmware again and is now ready to start
- 10) Press a key on your computer keyboard to close the window and shut down the update program